cudy

Model: UH405

5-In-1 HDMI
4K USB-C Hub

4K 30Hz
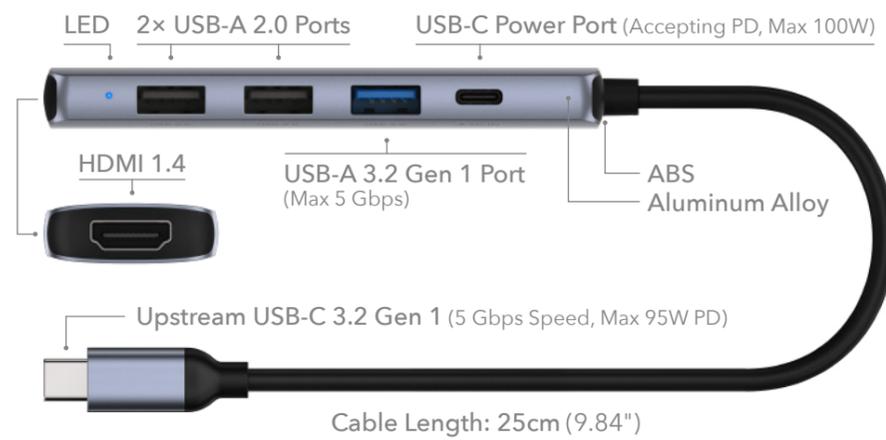
Highlights

Plug-and-Play USB-C dongle for extending a USB-C into HDMI and three USB-A ports, ideal for business people, lecturers, and school students.

LED 2× USB-A 2.0 Ports USB-C Power Port (Accepting PD, Max 100W)

HDMI 1.4 USB-A 3.2 Gen 1 Port (Max 5 Gbps) ABS Aluminum Alloy

Upstream USB-C 3.2 Gen 1 (5 Gbps Speed, Max 95W PD)

Cable Length: 25cm (9.84")

- 1× HDMI 1.4, 4K 30 Hz, 2K 60 Hz
- 1× 5 Gbps Upstream PD USB-C Male
- 1× 5 Gbps USB-A 3.2 Gen 1
- 2× USB-A 2.0
- 1× USB-C Receiving 100W PD
- 51 g (1.8 oz.)
- 103×32×11 mm (4.06×1.26×0.43")
- PC/Mac/iPad/iPhone/Android/Nintendo

Hardware Features

Interfaces	Upstream Port	1× USB-C 3.2 Gen 1 Port (5 Gbps)
	Video Output	1× HDMI 1.4
	Video Output Resolutions	4K (4096×2160) 30 Hz
		2K (2560×1440) 60 Hz
		1080P (1920×1080) 120 Hz
	Video Output Modes	Extend, Mirror
		Android phone supports mirror mode only
	USB Ports	1× USB-A 3.2 Gen 1 Port (5 Gbps)
		2× USB-A 2.0 Ports
	Power Input	USB-C Port
	LED	Power
Power	Power Methods	DC / PD
	DC	5~20V 0~5A
	Max Power Consumption (W)	100W if powered by a PD Adapter
		5W if powered by the host client's USB Power
	Idle Power Consumption (W)	0.2W

Hardware Features

Physical	Color	Silver Gray Color
	Casing	Aluminum
		ABS
Requirements	Hardware Requirement	Requires a USB-C 3.2 Gen 1 / USB4 / Thunderbolt 3/4 port on the host device
	Compatible OS	Windows 7 or later
		macOS 10.12 or later
		Ubuntu LTS 18.04 or later
		Android 5 or higher
		iPadOS
		iOS
	Driver Installation	Driver Free
Reliability	Environment	Operating Temperature: 0~40 °C (-32~104 °F)
		Storage Temperature: -20~70 °C (-10~158 °F)
		Operating Humidity: 20~85% RH non-condensing
		Storage Humidity: 10~90% RH non-condensing

Hardware Features

Mechanical	Product Weight	51 g (1.8 oz.)
	Dimension	Main Part :
		Main Part :
		103×32×11 mm
		4.06×1.26×0.43 inches
		Cable:
		250mm
		9.84 inches